


TECHNICAL SPECIFICATION

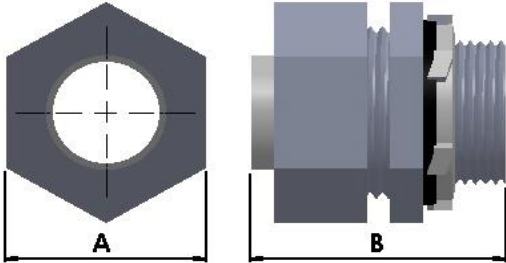

Liquid Tight Connector - Straight

Used to connect Flexible Liquid Tight Conduit to enclosure

Material: Iron
(Use suffix S with Cat No. for Steel)

Finish: Electrogalvanized
(Use suffix HDG with Cat No. for Hot Dip Galv.)

CATNO.	SIZE	DIMENSIONS	
		A	B
LTS050	1/2"	32.00	44.00
LTS075	3/4"	38.00	43.00
LTS100	1"	43.00	49.00
LTS125	1-1/4"	56.00	51.00
LTS150	1-1/2"	62.00	53.00
LTS200	2"	76.00	61.00

** All dimensions in mm

CATNO.	SIZE	DIMENSIONS	
		A	B
LTS20	20	32.00	44.00
LTS25	25	38.00	43.00
LTS32	32	43.00	49.00
LTS40	40	56.00	51.00
LTS50	50	62.00	53.00

** All dimensions in mm

