

TECHNICAL SPECIFICATION

Top Beam Clamp


Used to hang conduits etc to mounting surface with help of thread rod

Through hole vertical support for thread rod.

Material: Iron

Finish: Electrogalvanized

(Use suffix HDG with Cat No. for Hot Dip Galv.)

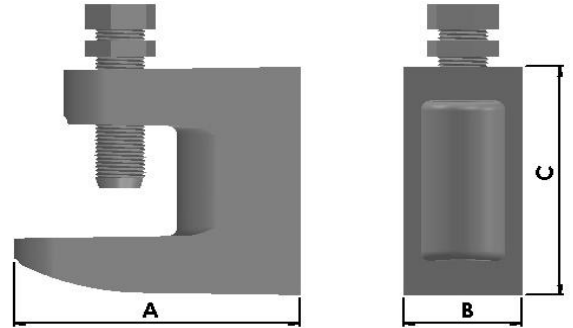

TYPE D



TYPE DA

CATNO.	ROD SIZE	HOLE SIZE	FLANGE SIZE	DIMENSIONS		
				A	B	C
BC06D	6 mm	7 mm	18 mm	38.10	17.46	34.93
BC08D	8 mm	9 mm	18 mm	38.10	17.46	34.93
BC08DH	8 mm	9 mm	19.4 mm	43.66	20.64	42.07
BC10D	10 mm	11 mm	19.4 mm	43.66	20.64	42.07
BC10DH	10 mm	11 mm	22.3 mm	43.66	20.64	42.07
BC12D	12 mm	13 mm	25.5 mm	57.15	21.43	53.98
BC16D	16 mm	17 mm	26.8 mm	57.15	28.58	58.74
BC06DA	6 mm	7 mm	18 mm	38.10	17.46	34.93
BC08DA	8 mm	9 mm	18 mm	38.10	17.46	34.93
BC08DHA	8 mm	9 mm	19.4 mm	43.66	20.64	42.07
BC10DA	10 mm	11 mm	19.4 mm	43.66	20.64	42.07
BC12DA	12 mm	13 mm	25.5 mm	57.15	21.43	53.98
BC20DA	20 mm	21 mm	33.1 mm	63.50	34.93	69.06

** All dimensions in mm