


TECHNICAL SPECIFICATION

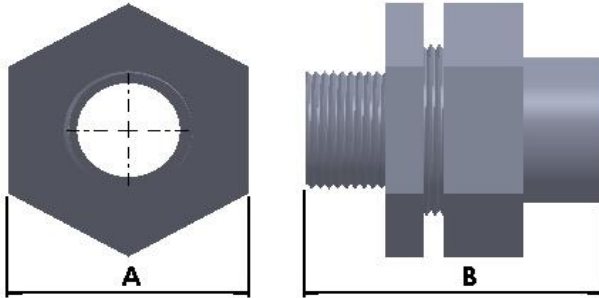

Union - Exp Proof Design (UNY)

Used to connect conduit to hub or other fittings

Explosion proof design to prevent the escape of gases

Material:

Upto 1" Steel as Standard

Above 1" Iron as Standard

Finish: Electrogalvanized

(Use suffix HDG with Cat No. for Hot Dip Galv.)

CATNO.	SIZE	DIMENSIONS	
		A	B
UNY050	1/2"	38.00	50.00
UNY075	3/4"	42.00	59.00
UNY100	1"	51.00	62.00
UNY125	1-1/4"	72.00	76.00
UNY150	1-1/2"	78.00	92.00
UNY200	2"	95.00	86.00
UNY250	2-1/2"	124.00	115.00
UNY300	3"	137.00	128.00
UNY350	3-1/2"	150.00	125.00
UNY400	4"	164.00	149.00
UNY500	5"	210.00	142.00
UNY600	6"	245.00	146.00

** All dimensions in mm

